

Алматы (7273)495-231 Ангарск (3955)60-70-56 Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Благовещенск (4162)22-76-07 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Владикавказ (8672)28-90-48 Владимир (4922)49-43-18 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89	Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Коломна (4966)23-41-49 Кострома (4942)77-07-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Курган (3522)50-90-47 Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Новыйорск (3496)41-32-12 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Петрозаводск (8142)55-98-37 Псков (8112)59-10-37 Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Саранск (8342)22-96-24 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Сыктывкар (8212)25-95-17 Тамбов (4752)50-40-97 Тверь (4822)63-31-35	Тольятти (8482)63-91-07 Томск (3822)98-41-53 Тула (4872)33-79-87 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Улан-Удэ (3012)59-97-51 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Чебоксары (8352)28-53-07 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Чита (3022)38-34-83 Якутск (4112)23-90-97 Ярославль (4852)69-52-93
Россия +7(495)268-04-70		Казахстан +7(7172)727-132	Киргизия +996(312)96-26-47	

https://furuno.nt-rt.ru || fon@nt-rt.ru

SPECIFICATIONS

GENERAL

Frequency	LF 80-160 kHz
FAX:	MF/HF 2-25 MHz
NAVTEX:	490 kHz, 518 kHz
Class of Emission	F3C/J3C
FAX:	F1B
NAVTEX:	Double superheterodyne
Receiving System	1000 channels
Number of Channels	60, 90, 120, 180 or 240 r.p.m., automatic or manual selection
Scanning Speed	576 or 288
IOC	automatic or manual selection
Display Color	Monochrome, 8 shades of gray, Blue shades, Pink and Black, Red and blue
Networking Interface	Ethernet 10 BASE-T TCP/IP

POWER SUPPLY

MINIMUM SYSTEM REQUIREMENTS FOR PC

OS:	Windows 98, 2000, XP, Vista
CPU:	600 MHz or faster

RAM:	128 MB or more
Resolution:	1024 x 768 pixels
Network Facility:	Ethernet network facility required
Browser:	Internet Explorer Ver. 5.01 SP2/5.5 SP2/6.0 SP1/7.0 Netscape® Communicator Ver. 4.78/6.2/7.0

Environment

Temperature	-15C to +55C
Waterproof	IPX2

EQUIPMENT LIST

Standard

- | | |
|---|--------|
| 1. Receiver Unit FAX-30 | 1 unit |
| 2. Installation Materials and Spare Parts (including 5 m Power Cable) | 1 set |

Option

- Preamplifier Unit FAX-5 with 15 m cable
- Whip Antenna for FAX-5 04S4176
- Antenna Fixing Clamp OP08-11
- Extension Kit for Antenna Cable OP-04-2 10/20/30/40/50 m
- PC Adapter Cable MJ-A6SPF0017-050C
- HUB Adapter Cable MJ-A6SRMD/TM11AP8-005
- Automatic Printing Software FAX-30-APT

Барнаул (385) 4
Брянск




Model: FAX-30

Receiver Unit


FAX-30 2.0 kg 4.4 lb

Preamplifier Unit (option)

FAX-5 1.3 kg 2.9 lb

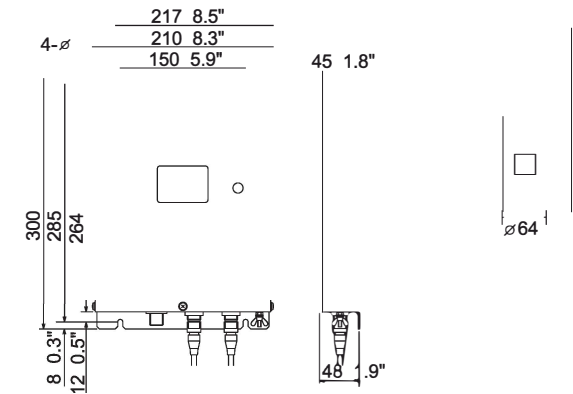

INTERCONNECTION DIAGRAM

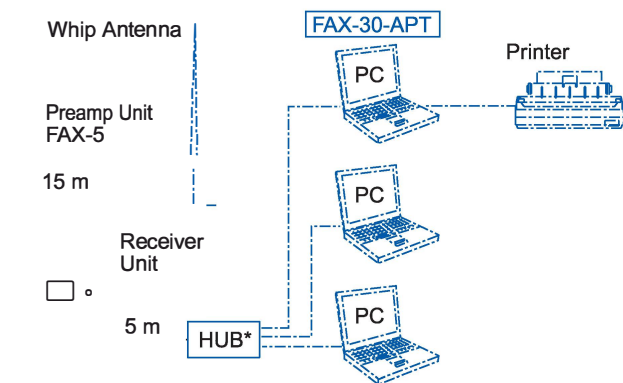

12-24 VDC

Option
Locally arranged

* Not required to connect single PC.
NOTE: FAX-30 cannot be accessed by more than one PC at a time.
FAX-30-APT can not be run in multiple PC at a time.



FURUNO's cost effective solution for gathering crucial Weather/Navigation information on a PC



The FURUNO FAX-30 can turn any commercial PC into a weather fax and NAVTEX receiver. This "BlackBox" receiver unit allows direct connection with a single Ethernet cable to a commercial PC showing weather charts and satellite images.

The standard package includes the receiver unit and installation materials. An optional antenna and Windows® based PC are required for basic operation. The information can be viewed simply by using an Internet browser, there is no complicated software to learn. Print out the weather and NAVTEX information by using a printer interfaced with a PC. In addition, the FAX-30 has no mechanical moving parts, which provides maintenance-free and cost-effective solutions for safety information gathering.


The FAX-30 receives weather map broadcasts from a fax transmitting station working under World Meteorological

Organization (WMO) standards. Up to twelve received pictures can be stored on the internal memory. Drum speeds, Index of Cooperation (IOC), and other essential parameters are manually or automatically selected to ensure quality reception. The fax station, which provides optimum image quality, can be searched utilizing the auto channel mode. The station is selected according to the quality of the signal reception. Phase and synchronization can be adjusted even after the reception is completed.

The stored pictures can be freely rotated or zoomed in/out on the screen. Display colors are selectable from three patterns of color, eight tones of gray scale and monochrome.

With a built-in NAVTEX receiver, you can view up to 130 recently received NAVTEX messages. The NAVTEX messages cannot be received while receiving FAX images.

Weather Chart

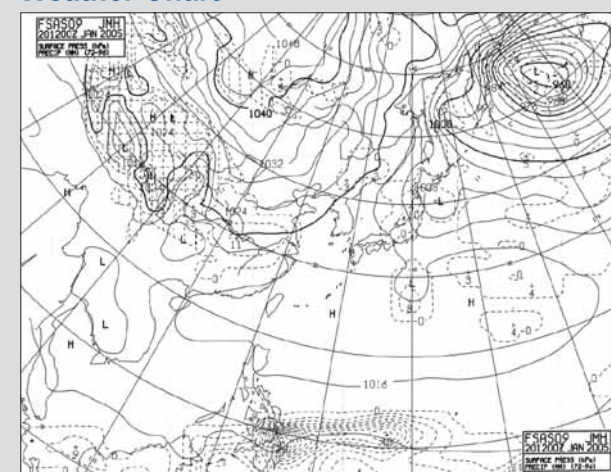


Navtex Message

GD75 JAN/21 05:49 518kHz ERROR RATE=0.0%

ZCZC GD75
221700 UTC JAN 05
OVERBOARD NO.20
RUNNING UNMANNED FISHING BOAT WAS
SIGHTED IN POSITION SOUTHWEST OF
YAKUSHIMA(30-12.3N 130-25.9E)
AT 220750UTC.
THE CREWMAN SEEMS TO HAVE FALLEN
OVERBOARD.
SHIPS IN THE VICINITY ARE REQUESTED TO
KEEP A SHARP LOOKOUT AND REPORT ANY
INFORMATION TO JAPAN COAST GUARD.

NNNN

Browsing Screen

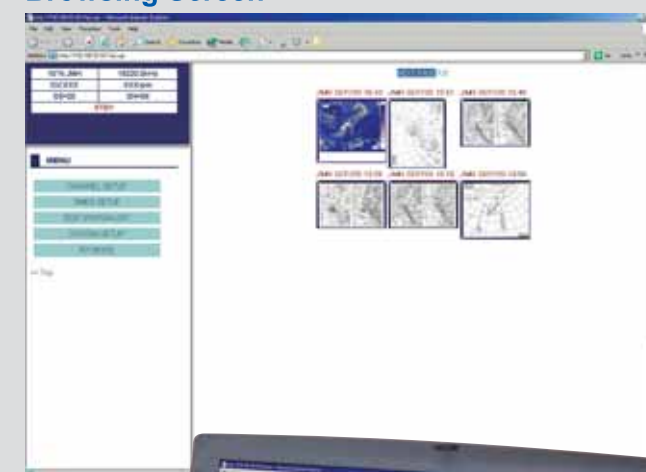

Satellite Image



- BlackBox unit connects directly to a PC with a printer through a single Ethernet cable.
- Presents weather charts, satellite images and NAVTEX messages on a PC screen
- Selected images/messages can be printed out from a printer interfaced with a PC
- Noise Rejection for clearer images
- Straightforward operation by using web browser such as Internet Explorer or Netscape®
- Thumbnail view for easy selection of stored images
- Built-in NAVTEX receiver
(The receiver does not conform to GMDSS regulations.)
- Storage of up to twelve images and 130 NAVTEX messages on internal memory
- Fully automatic facsimile operation with a built-in schedule timer
- Facsimile images available in color, gray scale or monochrome

А лматы (7273)495-231	И ваново (4932)77-34-06	М агнитогорск (3519)55-03-13	Р остов-на-Дону (863)308-18-15	Т ольятти (8482)63-91-07
А нгарск (3955)60-70-56	И жевск (3412)26-03-58	М осква (495)268-04-70	Р язань (4912)46-61-64	Т омск (3822)98-41-53
А рхангельск (8182)63-90-72	И ркутск (395)279-98-46	М урманск (8152)59-64-93	С амара (846)206-03-16	Т ула (4872)33-79-87
А страхань (8512)99-46-04	К азань (843)206-01-48	Н абережные Челны (8552)20-53-41	С анкт-Петербург (812)309-46-40	Т юмень (3452)66-21-18
Б арнаул (3852)73-04-60	К алининград (4012)72-03-81	Н ижний Новгород (831)429-08-12	С аратов (845)249-38-78	У льяновск (8422)24-23-59
Б елгород (4722)40-23-64	К алуга (4842)92-23-67	Н овокузнецк (3843)20-46-81	С евастополь (8692)22-31-93	У лан-Удэ (3012)59-97-51
Б лаговещенск (4162)22-76-07	К емерово (3842)65-04-62	Н оябрьск (3496)41-32-12	С аранск (8342)22-96-24	У фа (347)229-48-12
Б рянск (4832)59-03-52	К иров (8332)68-02-04	Н овосибирск (383)227-86-73	С имферополь (3652)67-13-56	Х абаровск (4212)92-98-04
В ладивосток (423)249-28-31	К оломна (4966)23-41-49	О мск (3812)21-46-40	С моленск (4812)29-41-54	Ч ебоксары (8352)28-53-07
В ладикавказ (8672)28-90-48	К острома (4942)77-07-48	О рел (4862)44-53-42	С очи (862)225-72-31	Ч елябинск (351)202-03-61
В ладимир (4922)49-43-18	К раснодар (861)203-40-90	О ренбург (3532)37-68-04	С таврополь (8652)20-65-13	Ч ереповец (8202)49-02-64
В олгоград (844)278-03-48	К расноярск (391)204-63-61	П енза (8412)22-31-16	С ургут (3462)77-98-35	Ч ита (3022)38-34-83
В ологда (8172)26-41-59	К урск (4712)77-13-04	П етрозаводск (8142)55-98-37	С ыктывкар (8212)25-95-17	Я кутск (4112)23-90-97
В оронеж (473)204-51-73	К урган (3522)50-90-47	П сков (8112)59-10-37	Т амбов (4752)50-40-97	Я рославль (4852)69-52-93
Е катеринбург (343)384-55-89	Л ипецк (4742)52-20-81	П ермь (342)205-81-47	Т верь (4822)63-31-35	
Россия +7(495)268-04-70		Казахстан +7(7172)727-132		Киргизия +996(312)96-26-47

https://furuno.nt-rt.ru || fon@nt-rt.ru